


GP-TD418

Fiber Optic Floor Terminal Box

Applications

- The box is designed for providing full splice and perfect fiber management.
- With the 8 drop ports on bottom and 8 drop ports on top, the box can be also for the connection of fibers and pigtailed for the fiber optic distribution.
- The box is used in building or in the street cabinet.

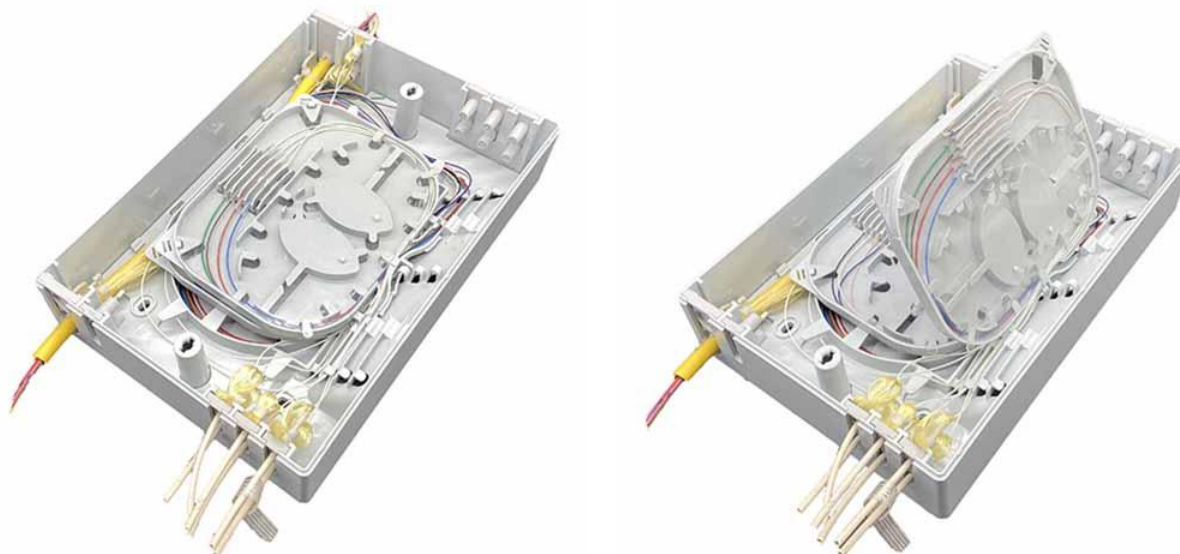


Specifications

Part No.	GP-TD418
Dimension	240×165×54mm
Inlet ports and cable dia.(max.)	4 × Ø15mm (2 in bottom and 2 in top)
Outlet cable ports and cable dia.(max.)	16 × Ø 5mm (8/8)
Splice capacity	12/24/48 FO
Max. number of tray	4
PLC Splitter	4x 1:8 or 4x 1:4 micro splitter
Cover lock type	2 plastic locks + 1 plastic key
Mount type	Wall-mounted




Splice tray and its holder

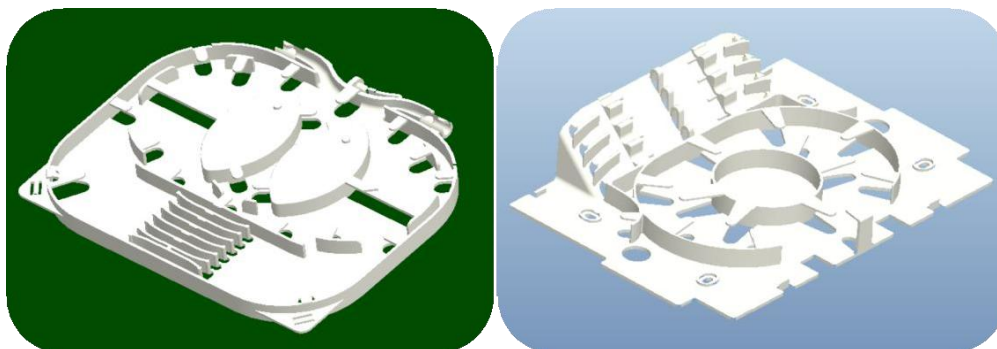

Part No.	Splice tray P0418
Dimensions	137x119x8mm
Material	Plastic
Splice capacity	6/12 FO
Suitable sleeve	45 -60 mm
PLC Splitter slot	1
Suitable splitter	1x4 or 1x8 micro PLC splitter
Bend radius	≥30mm
Transparent cover	For each each tray
Hold angle degree	45/90 degree

Accessories

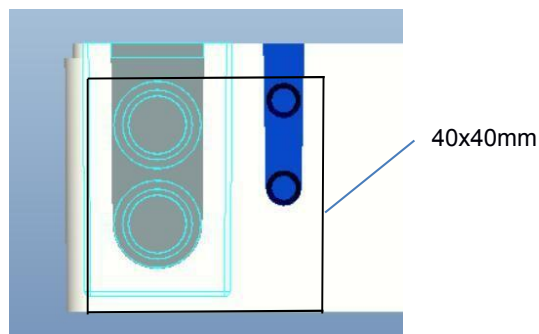

Name of Accessory	Description	QTY
Splice sleeve	L=45mm	As per order
Drop cable tie	3*100mm	12pcs
Main cable tie	2.5*145	4pcs
Wall-mounting kits	4 bolts 4*30mm, 4 plastic expansion pipes	4 sets